


GE Zoneline® Cooling and Electric Heat Unit, 230/208 Volt



Model# AZ45E07DAB

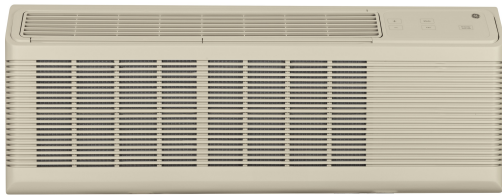

- Cooling capacity - 7,200/7,000 BTU
- Energy efficiency - 13.4/13.4 EER
- Dehumidification - 1.7 pints/hour
- Indoor fan CFM (high/low) - 409/250
- Fresh air vent CFM (fully open high fan) - 33
- Quiet operation - Baked-on mastic sound barrier, cross flow blower and two DC fan motors create less noise to ensure comfort
- Heat & Freeze Sentinels - Keeps the room from overheating or freezing
- Electronic temperature limiting - Prevents expensive over-cooling or over-heating of the room
- - Electronic touch controls with LED display
- - R-410A refrigerant
- - SMC base pan
- Simplified structure - Easy to maintain and service

FEATURES

| | |
|-----------------------------------|---|
| Sensible Heat Ratio | 70% |
| Chassis Type | Slide-In |
| Control Type | Coverless Backlit White LED Touch Controls |
| Discharge Grille | 2-position |
| Electronic Micro Computer Control | Yes |
| Fan Cycle Switch | Yes |
| Fan Motor | 2 |
| Fan Speed Control | Yes |
| Fan Speed Selections | Hi/Low Cooling; Hi/Low Fan Only; Hi/Low Heating |
| Filter Type | Rigid Frame; Slide-Out |
| Heat - Cool | Yes |
| Louver Style | Reversible |
| Manual Vent Control | Hidden |
| Rotary Compressor | Yes |
| Temperature Limiting | Electronic 7-Step |
| Vent Control | 3-position |
| Venting Features | Concealed Manual Vent Control; Outdoor Vent Control - 3 Positions; Vent Air Filter |
| Zoneline Features | "Sleep" Mode; "Smart Fan" Fan Cycle Control; Auto Power Recovery; Automatic Indoor Frost Control; Central Desk Control Compatibility; Freeze Sentinel; Heat Sentinel; LCDI Power Cord; Proportional - Integral ID Airflow; Random Twist/Length Segment Tangential Blower; Remote Thermostat Compatibility; Universal Heaters; Weather Protected Electrical Components |
| Temperature Range | 60 - 85 F |

Have more questions? Please contact 1-800-626-2005

GE Zoneline® Cooling and Electric Heat Unit, 230/208 Volt



Model# AZ45E07DAB

APPROXIMATE DIMENSIONS (HxDxW)

- 16 in x 20 13/16 in x 42 in

CAPACITY

- Cooling BTUH (MIN) 7000.00 Btu
- Cooling BTUH (MAX) 7200.00 Btu
- Cooling EER (BTUH / Watt) 13.4/13.4
- CFM Indoor Fan High 348
- CFM Indoor Fan Low 233
- Dehumidification (pts./hr.) 1.70
- Vent CFM (high fan at zero ESP) 33

WARRANTY

- Parts Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Labor Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Warranty Notes - See written warranty for full details